


Dryer Blowers

Part Number	Voltage	Cycles	Weight pound-kg	Dimensions			Connections
				"A"	"B"	"C"	
29035901	115/230V	50/60 Hz	19.8-9	8.66"	9.53"	9.53"	32.5 mm Diameter Slip
29035902	230/460V	50/60 Hz	4.41-20	10.83"	13.54"	12.21"	1-1/2" Pipe or Flange
29035903	230/460V	50/60 Hz	70.5-32	13.19"	15.28"	13.71"	1-1/2" Pipe or Flange
29035904	230/460V	50/60 Hz	105.5-48	15.39"	17.21"	15.24"	1-1/2" Pipe or Flange
29035905	200/230/460V	50/60 Hz	77.0-35	13.66"	15.28"	14.57"	1-1/2" Pipe or Flange
29035906	200/230/460V	50/60 Hz	27.5-12.5	9.53"	11.73"	11.02"	1-1/4" Pipe or Flange
29035907	575V	50/60 Hz					1-1/2" Pipe or Flange
29035908	575V	50/60 Hz					1-1/2" Pipe or Flange
29035909	575V	50/60 Hz					1-1/2" Pipe or Flange
29035910	575V	50/60 Hz					1-1/4" Pipe or Flange
29035911	200/230/460V	50/60 Hz	126.0-57.2	15.20"	16.69"	15.65"	2" Pipe or Flange
29035912	200/230/460V	50/60 Hz	22.0-10	8.66"	10.24"	9.92"	40.6 mm Diameter Slip
29035913	200/230/460V	50/60 Hz	22.0-10	8.66"	10.24"	9.92"	40.6 mm Diameter Slip
29035914	575V	50/60 Hz	22.0-10	8.66"	10.24"	9.92"	40.6 mm Diameter Slip
29035915	575V	50/60 Hz	126.0-57.2	15.20"	16.69"	15.65"	2" Pipe or Flange
29035916	200/230/460V	50/60 Hz	19.8-9	8.66"	9.53"	8.98"	32.5 mm Diameter Slip
29035917	575V	50/60 Hz	19.8-9	8.66"	9.53"	8.98"	32.5 mm Diameter Slip
29035918	200/230/460	50/60 Hz	130.0-59	14.84"	17.80"	16.69"	2" NPSC
29035919	575V	50/60 Hz	22.0-10	8.66"	10.24"	9.92"	40.6 mm Diameter Slip
29035920	115/230V	50/60 Hz	14.3	7.87"	8.19"	7.87"	1" Diameter Slip
29035921	380/415V	50 Hz	83.5-38	12.93"	15.34"	14.59"	1-1/2" Pipe or Flange
29035922	380/415V	50 Hz	126-57.2	15.2"	16.69"	15.65"	2" Pipe or Flange
29035923	380/415V	50 Hz	130.0-59	14.84"	17.80"	16.69"	2" NPSC
29035924	200/230/460V	50/60 Hz					
29035925	575V	50/60 Hz					

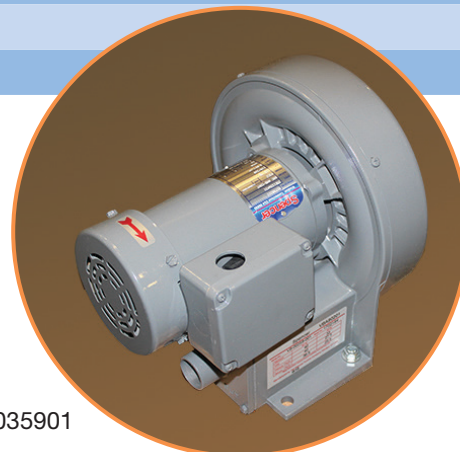

29035901